

POLYISOCYANURATE FACER GUIDE



FIBER REINFORCED PAPER FACER (GRF)


- Highest Recycled Content (LEED)
- Most Economical Facer
- ASTM C 1289 Type II, Class 1, Grade 2 (20 psi) or Grade 3 (25 psi)

Systems

Single-Ply
Modified Bitumen
BUR
Standing Seam

Products

H-Shield
H-Shield NB
H-Shield WF
Cool-Vent
Tapered H-Shield
Hinged Target Sump
Straight or Bevel Cut H-Shield

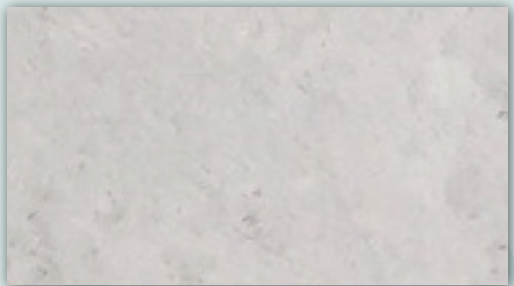

COATED GLASS FACER (CGF)


- Premium performance facer and superior facer to foam bond
- Better coverage rate with adhesives
- Increased moisture resistance and dimensionally stable
- Meets UL Class A direct to the combustible deck with 3" w/o the use of fire rated slip sheet or gypsum cover board
- Meets UL Class B with minimum 1.9" thickness
- Passed (10) Resistance to Mold test ASTM D 3273
- Recycled content
- ASTM C 1289 Type II, Class 2, Grade 2 (20 psi) or Grade 3 (25 psi)

Systems

Single-Ply
Modified Bitumen
BUR
Standing Seam

Products

H-Shield CG
H-Shield NB
Tapered H-Shield CG
H-Shield HD
H-Shield HD Composite CG
Cool-Vent
Hinged Target Sump
Straight or Bevel Cut H-Shield

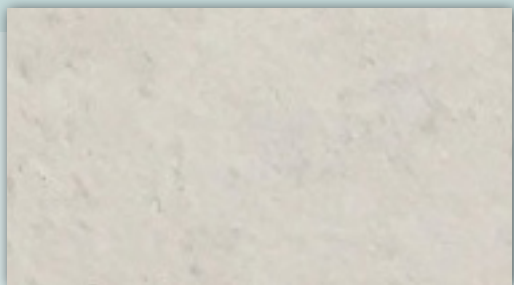

PREMIER FACER (CGF)

- Extra durable - double coated CG Facer
- Better coverage rate with adhesives
- Increased moisture resistance and dimensionally stable
- Meets UL Class A direct to the combustible deck with 1/2" HD FR or 1" w/o the use of a fire rated slip sheet or gypsum cover board
- Passed (10) Resistance to Mold test ASTM D 3273
- ASTM C1289 Type II, Class 2, Grade 2 (20 psi) or Grade 3 (25 psi)

Systems

Single-Ply
Modified Bitumen
BUR
Standing Seam

Products

H-Shield Premier
H-Shield HD FR



HUNTER
Energy Smart Polyiso

15 FRANKLIN STREET, PORTLAND, MAINE 04101
TF 888.746.1114 F 877.775.1769 · HUNTERPANELS.COM