


# Use Hunter Xci CG — The Right Choice for ci in Stucco Installations

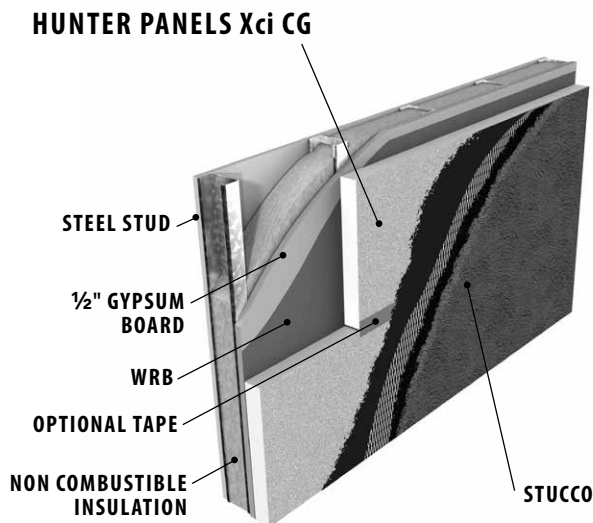

## SALES BENEFITS:

- Higher R-value per inch of polyiso equates to thinner profile walls
- Hunter Xci CG has 3 times greater impact resistance than standard expanded polystyrene insulation
- Large panel sizes available for faster installation

## THE PRODUCT:

- Polyiso foam core – high R-value in thin profile
- Provides superior dimensional stability, facer is resistant to mold growth
- NFPA 285 compliant in many assemblies
- Rigidity of the boards hides aesthetic wall anomalies
- CG Facer increases the keying surface area which allows for a greater bond
- Available in 4'x8' or custom sizes, from 1" – 3.5" with R values from 6.0–21.7
- 20 and 25 Psi available

## STANDARD WALL STUCCO SYSTEM:

- Two layers of WRB (insulation maybe substituted as one of these layers)
- Polyiso mechanically attached to substrate
- Required Metal Lath
- Fiber reinforced cement basecoat
- Color coat

## THE APPROVALS:

- NFPA 285
- Facilities compliance with ASHRAE 90.1, IECC, IBC, IRC
- ASTM E 2178
- ASTM D 1037

Samples and literature available  
at [www.hunterpanels.com](http://www.hunterpanels.com)



HUNTER  
CONTINUOUS INSULATION

Hunter Panels • 15 Franklin St, Portland, Maine 04101  
888.746.1114 • Fax 877.775.1769 • [www.hunterpanels.com](http://www.hunterpanels.com)