


Fastening Information for CMU, Concrete or Steel Stud Walls

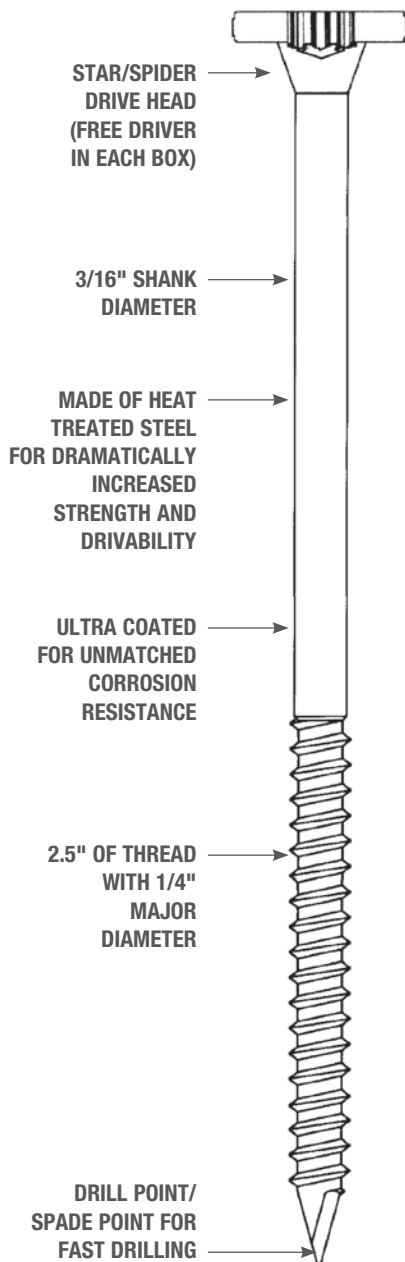

Hunter Panels SIP SD Fastener is intended to mechanically attach Hunter Xci NB, Hunter Xci Ply or Xci Ply (Class A) to CMU, Concrete or Steel Stud wall types. Hunter Panels SIP SD Fastener has the following features:

- FM approved—plates not required
- pull out values for metal
- star/spider head eliminates need for washer and offers dramatically increased pull-out value
- multiple bits included in each pail
- 100% American made
- fast, one-step steel stud installation
- no pre-drilling required in steel stud applications
- for use with 18 ga and lighter steel studs
- for use on concrete or cmu, $\frac{3}{16}$ " pilot hole $1\frac{1}{2}$ " deep is required

| Test Description | Typical Value |
|---------------------------|---------------|
| Pull-through (lbs) | 630* |
| Pull-out (lbs): | |
| 22 gauge metal | 510 |
| 20 gauge metal | 645 |
| 18 gauge metal | 920 |

Fasteners should never be struck with a hammer during installation.
*Through $\frac{7}{16}$ " OSB

| Physical Data Chart | |
|-------------------------|-----------------------------------|
| Head Diameter | .625" |
| Thread Diameter | .240" |
| Shank Diameter | .190" |
| Fastener Length* | 3½", 4", 4½", 5", 5½", 6", 6½" |

**Minimum 1"
penetration
into
steel stud.**

*Consult NTA Report for recommended fastener spacing.