



Hunter Panels Flat Polyiso Roofing Products

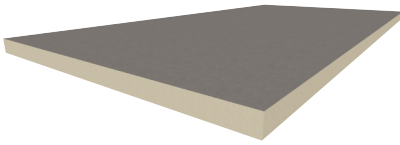

H-SHIELD Flat Insulation

- Available in 4'x4' and 4'x8' and in 20 or 25 PSI
 - UL Class A and FM Class 1
 - Highest Recycled Content
 - Most Economical Polyiso Product
 - **Applications:** Standing Seam Metal, BUR, Modified Bitumen, Cold Applied
- Single-Ply Systems: Ballasted, Mechanically Attached, Fully Adhered

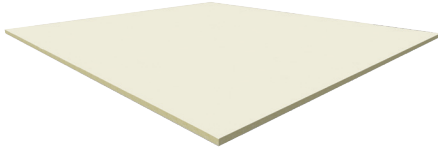


H-SHIELD CG Premium Performance Faced Insulation

- Available in 4'x4' and 4'x8' and in 20 or 25 PSI
 - UL Class A and FM Class 1
 - Mold resistant facer, 9% pre-consumer recycled content
 - SH1 Hail Rating
 - Increased moisture resistance and dimensionally stability
 - **Applications:** Standing Seam Metal, BUR, Modified Bitumen, Cold Applied
- Single-Ply Systems: Ballasted, Mechanically Attached, Fully Adhered, Liquid Applied Membrane, Spray Foam



H-SHIELD PREMIER Manufactured On-Line to Heavy Duty Coated Glass Facers

- Available in 4'x4' and 4'x8' and in 20 or 25 PSI
 - UL Class A combustible deck assembly rating at a 1" thickness without the use of a fire-rated slip sheet or gypsum cover board
 - SH1 Hail Rating
 - **Applications:** Any construction requiring Class A Ratings, BUR, Modified Bitumen, Cold Applied
- Single-Ply Systems: Ballasted, Mechanically Attached, Fully Adhered, Liquid Applied Membrane, Spray Foam

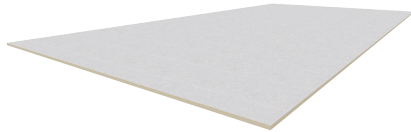


H-SHIELD HD 1/2" High-Density Cover Board

- Available in 4'x4' and 4'x8' with 109 PSI max
 - Mold resistant facer, 9% pre-consumer recycled content
 - SH1 Hail Rating
 - Lightweight cover board product (only 11 lbs per board)
 - New Construction and Retrofit
 - **Applications:** BUR, Modified Bitumen, Cold Applied,
- Single-Ply Systems: Mechanically Attached, Fully Adhered, Liquid Applied Membrane, Spray Foam



H-SHIELD HD FR 1/2" High-Density Fire Rated Polyisocyanurate Panel

- Achieves a UL 790 Class A combustible deck assembly rating at 1/2" thickness without the use of a fire-rated slip sheet or the presence of a fire barrier
- Available in 4'x4' and 4'x8' with 109 PSI max
- Mold resistant facer, 9% pre-consumer recycled content
- SH1 Hail Rating
- Lightweight cover board product (only 11 lbs per board)
- New Construction and Retrofit
- **Applications:** BUR, Modified Bitumen, Single-Ply Systems: Mechanically Attached, Fully Adhered

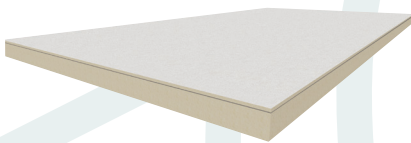


H-SHIELD HD COMPOSITE CG 1/2" H-Shield HD Manufactured On-Line to Premium Performance Polyiso

- Available in 4'x4' and 4'x8'
 - UL Class A and FM Class 1
 - Mold resistant facer, 9% pre-consumer recycled content
 - SH1 Hail Rating
 - New Construction and Retrofit
 - **Applications:** BUR, Modified Bitumen, Cold Applied,
- Single-Ply Systems: Mechanically Attached, Fully Adhered, Liquid Applied Membrane, Spray Foam



H-SHIELD NB Manufactured On-Line to Oriented Strand Board or Plywood

- Available in 4'x4' and 4'x8' and in 20 or 25 PSI
- UL Class A and FM Class 1
- Not a structural panel
- 1.5" to 4.0" thicknesses, R-values from 6.3 - 21.1
- **Applications:** Low slope, heavyweight shingles and Standing Seam Metal Roof Systems

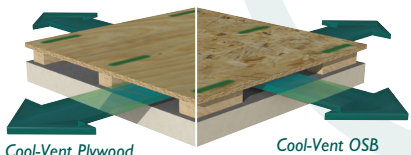

Cool-Vent Plywood

Cool-Vent OSB

COOL-VENT Ventilated Nailbase Polyiso Panel

- Available in 4'x4' and 4'x8' and in 20 or 25 PSI
- UL Class A and FM Class 1
- Bottom layer polyiso, middle wood block spacers, top layer OSB or plywood
- 2.5" to 5" thickness, R-values from 5.7 - 20.5
- **Applications:** Non-insulated cathedral and vaulted ceilings, steep slope 3:12 and greater



Hunter Panels | 15 Franklin St, Portland, Maine 04101 | 888.746.1114 | www.hunterpanels.com

NEW YORK ILLINOIS FLORIDA TEXAS UTAH PENNSYLVANIA WASHINGTON

