





Save in Adhesive Costs and Labor with Hunter Panels H-Shield HD Composite CG Cover Board

Architectural Plans and Specifications call for a cover board and an R-value of 22.2. Below are two scenarios in achieving this: the Traditional Assembly with 2 layers of Polyiso and a coverboard and The Hunter Panels Advantage with 2 layers of polyiso. Following is a cost comparison of adhesive applied and labor.

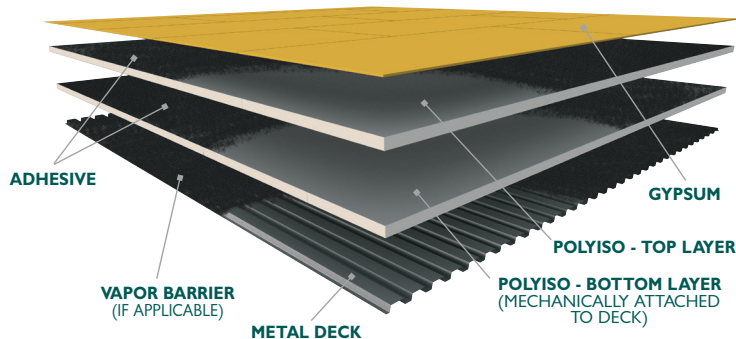

TRADITIONAL ASSEMBLY: R-VALUE = 24.0

2 layers of 2.0" H-Shield CG @ \$70.00 per sqr.....\$ 140.00
 2 applications of adhesive @ \$35.00 per sqr.....\$ 70.00
 1 layer of ½" Gypsum Cover Board @ \$52.00\$ 52.00
 TOTAL.....\$ 262.00/sqr

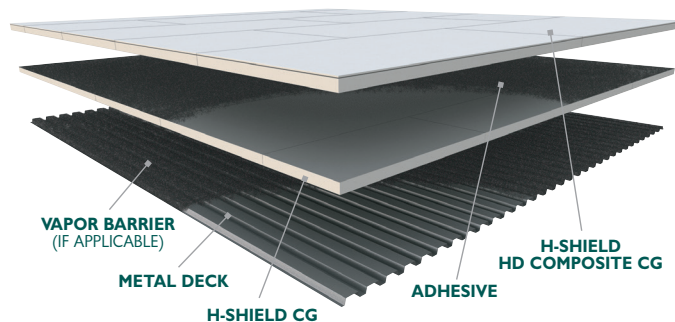

H-SHIELD HD COMPOSITE ASSEMBLY: R-VALUE = 25.3

1 layer of 2.0" H-Shield CG @ \$70.00 per sqr\$ 70.00
 1 layer of 2.5" H-Shield HD Composite CG @ \$127.00 per sqr.....\$ 127.00
 1 application of adhesive @ \$35.00 per sqr.....\$ 35.00
 TOTAL.....\$ 232.00/sqr

Total Material Savings of \$30.00/Square

(Costs shown are based on approximate contractor pricing)

Plus Labor Savings

- ½ less labor used for material handling, staging, and installation
- ½ less labor used to apply adhesive

FEATURES AND BENEFITS

- ½" H-Shield HD Grade 1 (109 psi max) manufactured on-line to a maximum thickness of 4.0" H-Shield CG
- Manufactured using only premium performance facers
- Resistance to mold, passed ASTM D 3273 (10)
- Hail Rating: SH-1
- For all roof system assemblies
- For both reroof and new construction, 47.5" x 47.5" or 47.5" x 95.5"
- At 2" minimum thickness, approved for Class 1 insulated steel deck and UL Class A in virtually all roof assemblies

For more information on this product, visit www.hunterpanels.com.

