




HUNTER

# XCI PLY, XCI CLASS A, AND XCI NB IN WOOD STUD WALLS

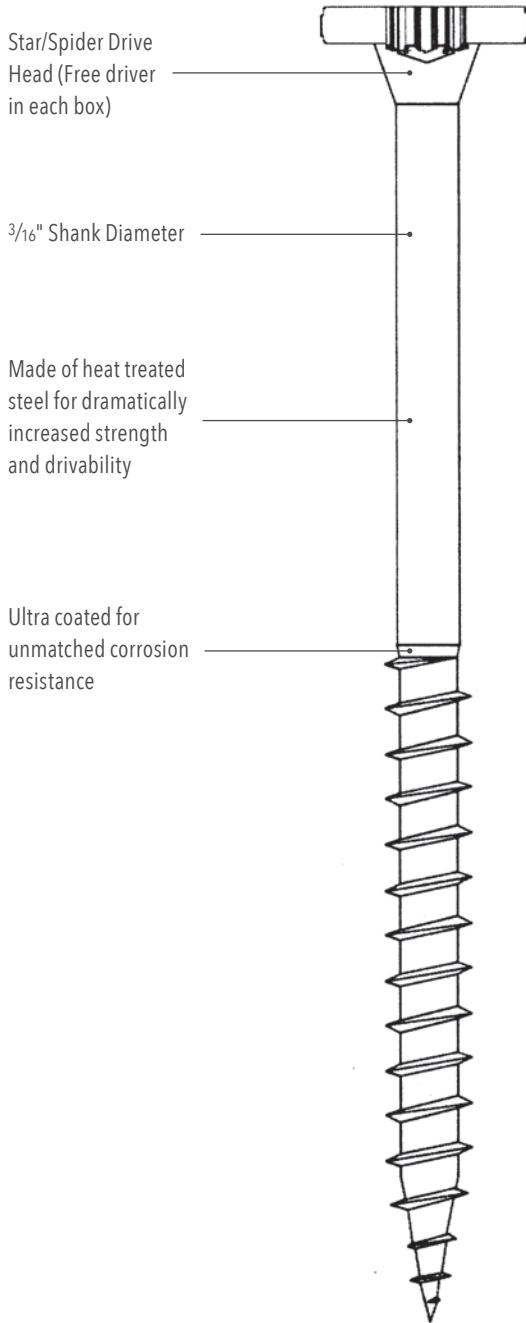

Hunter Xci SIP/WD Fastener is intended to mechanically attached Hunter Xci NB, Xci Ply and Xci Ply Class A to wood studs or wood framing. They can also be used for concrete and CMU applications with pre-drilling. Hunter Xci SIP/WD Fastener has the following features:

- FM approved – plates not required
- Star/spider head eliminates need for washer and offers increased pull-out value
- Fast, one-step installation
- No pre-drilling
- Multiple bits included in each pail

Description	Value
<b>Pull-through (lbs):</b>	
7/16" OSB	630
<b>Pull-out (lbs):</b>	
1/2" plywood	442
5/8" plywood	459
3/4" plywood	710
Douglas Fir (1" pen.)	768
<b>Head Diameter</b>	.625"
<b>Thread Diameter</b>	0.240"
<b>Shank Diameter</b>	0.190"
<b>Fastener Length*</b>	3", 3 1/2", 4", 4 1/2", 5", 5 1/2", 6", 6 1/2"

Values per FM 4470  
\* Consult DrJ TER 2102-05 for recommended fastener spacing.

**Minimum penetration is 1.5" - 2.0" depending on substrate.**



CONTINUOUS INSULATION

15 Franklin Street ■ Portland, Maine 04101 ■ 888.746.1114 ■ info@hpanels.com ■ www.hunterpanels.com