




HUNTER
CONTINUOUS INSULATION

Hunter Panels Xci Foil

Polyisocyanurate Insulation Manufactured On-Line to Foil Facers
for Exterior Commercial Wall Applications

HUNTER PANELS Xci FOIL

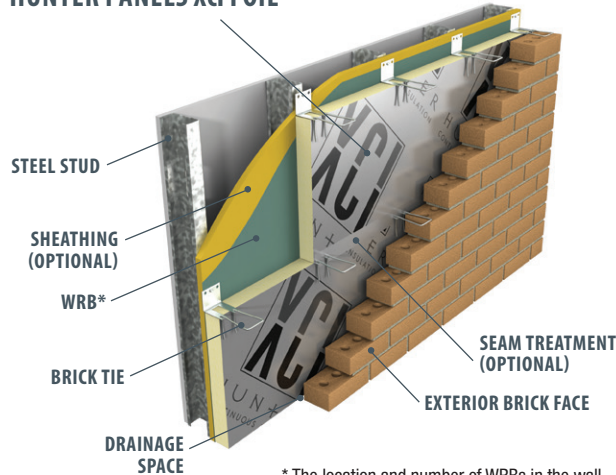

* The location and number of WRBs in the wall assembly are determined by the architect.
Contact Hunter Panels for a list of approved WRBs for each assembly.

Xci Foil Thermal Values

| Thickness (inches) | Thickness (mm) | R-Value |
|--------------------|----------------|---------|
| 1.00 | 25 | 6.5 |
| 1.50 | 38 | 10.0 |
| 2.00 | 51 | 13.3 |
| 2.50 | 64 | 17.0 |
| 3.00 | 76 | 20.3 |
| 3.50 | 89 | 24.0 |
| 4.00 | 102 | 27.0 |

Thermal values as per ASTM C 518 in accordance with ASTM C 1289.

Description

Xci Foil is an energy efficient rigid insulation panel composed of a closed cell polyisocyanurate foam core manufactured on-line to an impermeable foil facing material. It is designed for use in commercial and residential wall applications to provide continuous insulation within the building envelope.

Features and Benefits

- Polyiso offers increased R-value per inch vs mineral fiber, XPS or EPS options
- Designed for use in continuous insulation to assist in meeting the most current ASHRAE 90.1, IECC, IBC and IRC standards
- Manufactured with NexGen Chemistry: Zero Ozone Depleting Potential (ODP); Contains no CFCs, HCFCs or HFCs; Virtually zero Global Warming Potential (GWP). Use of Xci products helps reduce the carbon footprint of buildings.
- Lightweight yet durable, easy to handle. Cuts with a knife or saw.

Applications

- Provides continuous insulation (ci) for standard wood frame, FRT wood frame, steel stud, CMU and concrete exterior wall constructions
- Suitable for external ductwork
- Suitable for masonry cavity wall applications

Note: Xci Foil is not suitable for exposed interior applications.

Panel Characteristics

- Available in two compressive strengths per ASTM C 1289 Type 1, Grade 2 (20 psi) and Grade 3 (25 psi)
- Available 4' x 8' (1220mm x 2440mm) panels in thicknesses of 1" (25mm) – 4" (102mm)
- Other widths/lengths are available upon special request—(for example: 16" or 24" width)

Codes and Compliances

- ASTM C 1289
- IBC Chapter 26 and IRC Section R316
- Numerous NFPA 285 compliant assemblies
- Numerous UL 263 hourly designs
- DRJ Technical Evaluation Report 1402-02
- Miami Dade County Product Control Approved
- California Code of Regulations, Title 24, Insulation Quality Standard License #TI-1420
- California Bureau of Furnishings and Home Insulation
- CCMC 13460-L; Type 2, Class 1
- **UL Classified for use in Canada**
– Refer to UL Director of Products
Certified for Canada for more details
- CAN/ULC S-704 Type 1, Class 1

LEED Potential credits for Polyiso use

Energy and Atmosphere

- Optimize Energy Performance

Materials & Resources


- Building Life-Cycle Impact Reduction
- Environment Product Declaration
- Material Reuse
- 9% Pre-consumer Recycled Content
- Construction and Demolition Waste Management

Indoor Environmental Quality

- Thermal Comfort

Hunter Panels Xci Foil

Polyisocyanurate Insulation Manufactured On-Line to Foil Facers
for Exterior Commercial Wall Applications

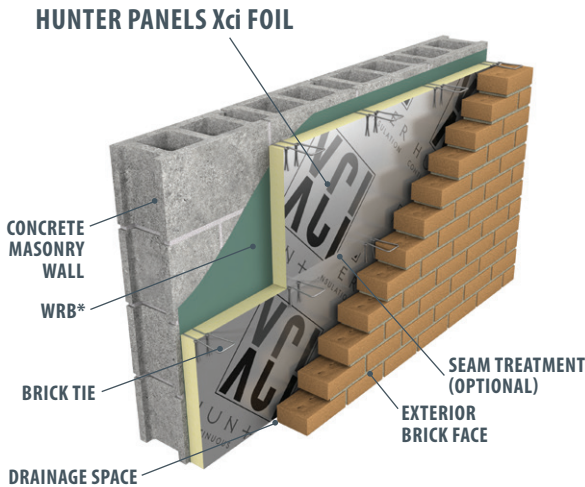

* The location and number of WRBs in the wall assembly are determined by the architect. Contact Hunter Panels for a list of approved WRBs for each assembly.

Typical Physical Property Data Chart

| Property | Test Method | Value |
|-----------------------------------|-------------|--|
| Compressive Strength | ASTM D 1621 | 20 psi* min. (138 kPa, Grade 2) |
| Dimensional Stability | ASTM D 2126 | 2% linear change (7 days) |
| Moisture Vapor Permeance | ASTM E 96 | <0.05 perm (2.875ng/(Pa•s•m ²)) |
| Water Absorption | ASTM C 209 | < 0.05% volume |
| Service Temperature | | -100° to 250° F (-73°C to 122°C) |
| Flame Spread Index (foam core) | ASTM E 84 | <75 |
| Smoke Developed (foam core) | ASTM E 84 | <450 |
| Recycled Content | | 9% pre-consumer |

*Also available in Grade 3 (25 psi)

R-Value Calculation – Cavity Wall Systems Comparison

| | 2" Polyiso | 2.5" Polyiso | 2" XPS |
|-----------------------------|--------------|--------------|--------------|
| Inside Air Film | .68 | .68 | .68 |
| 8" Concrete Block | 1.11 | 1.11 | 1.11 |
| Insulation | 13.30 | 17.00 | 10.00 |
| 4" Face Brick | .44 | .44 | .44 |
| Outside Air Film | .17 | .17 | .17 |
| Total Design R-Value | 15.70 | 19.40 | 12.40 |

Installation

Install Xci Foil between the concrete block wall and the exterior masonry. Attach insulation panels against the inner wall using construction grade adhesive or mechanical attachment. Xci Foil may also be applied directly to oil based waterproofing adhesives.

Post-Installation Exposure

During the time frame between installation of Xci Foil and the application of the finished exterior cladding, it is recommended that a building wrap be applied to the Xci Foil. If a building wrap has not been specified, ALL UNFACED FOAM EXPOSED TO DIRECT DAYLIGHT (i.e. corners, window and door openings) should be taped with a compatible waterproof tape. Xci Foil is not intended to be left exposed for extended periods of time (i.e. in excess of 60 days) without adequate protection. Please contact Hunter Panels for details.

WRB

The incorporation of Weather Resistant Barriers (air, vapor and moisture) is a critical element of a wall assembly. A design professional familiar with local code requirements should specify the selection and placement of any WRB. Furthermore, it is recommended that a hygrothermal analysis of the proposed assembly be conducted to determine the type and locations of a proposed WRB.

Note: The NFPA 285 fire test is an assembly test. The performance of the WRB must also be considered. Please consult Hunter Panels for details and specifications.

Job-Site Storage

Good construction practice dictates that all insulations should be protected from moisture and direct sunlight during job-site storage. Pallets of Hunter Panels Xci Foil are double packaged in a UV resistant polyethylene bag. This moisture resistant package is designed for protection from the elements during flat bed shipment from our factories to the job-site. Outdoor storage for extended periods of time requires waterproof tarpaulins and elevated storage above ground level a minimum of 2". Additionally, we recommend slitting the bundle packaging vertically down the center of the two short sides to prevent moisture accumulation within the package.

Warnings and Limitations

Insulation must be protected from open flame. Hunter Panels will not be responsible for specific building design by others, for deficiencies in construction or workmanship, for dangerous conditions on the job site or for improper storage and handling. Technical specifications shown in this literature are intended to be used as general guidelines only and are subject to change without notice. Call Hunter Panels for more specific details.

Note: Xci Foil is not intended for use below grade.



Hunter Panels | Energy Smart Polyiso | 888.746.1114 | www.hunterpanels.com

New York Illinois Florida Texas Utah Pennsylvania Washington



HUNTER
CONTINUOUS INSULATION